

200W Constant Power Mode with DALI-2 LED Driver XLG-200-DA2 series



IS 15885



(rd XLG-2001-DA2 type only) or L type) The L DC Input: 176-280Vdc Except for L type) (For XLG-2001-DA2 type only) DC Input: 176-280Vdc Except for L type) (For XLG-2001-DA2 type only) Note 15 C EXCept for L type)

Features

DALD

- Wide input range 100~305V AC(Class I)
- Full power output at 70~100% Constant power mode operation
- · Metal case with IP67, suitable for outdoor application
- Surge protection with 6KV/4KV
- DALI-2 Dimming with minimum level 8%
- 12V/250mA Auxiliary power available(optional)
- India (EESL) version with Input Over Voltage Protection can survive input voltage stress of 440Vac for 48 hours
- Protection functions: SCP/OTP
- · Life time >50,000 hrs. and 5 years warranty

Applications

- · Street lighting
- Floodlight Lighting
- Stage lighting
- Fishing lighting
- Horticulture lighting
- Bay lighting

GTIN CODE

• Type HL for use in class I, Division 2

MW Search: https://www.meanwell.com/serviceGTIN.aspx

Description

XLG-200-DA2 series is a 200W LED AC/DC driver featuring the constant power mode with DALI-2 dimming function. XLG-200-DA2 operates from 100~305VAC and offers models with different rated current ranging between 700mA and 5550mA. Thanks to the high efficiency up to 94%, with the fanless design, the entire series is able to operate for -40° C $\rightarrow+90^{\circ}$ C case temperature under free air convection. The design of metal housing and IP67 ingress protection level allows this series to fit both indoor and outdoor applications. Moreover the innovative environment-adaptive capability allows this series to reliably light on the LEDs for all kinds of application environments in almost any spots that may install LED luminaires in the world. XLG-200-DA2 series comply with the latest version of IEC61347/GB19510.1 and UL8750 international safety regulations. The output and dimming circuit are also completely in accordance with the new regulations with isolation to ensure the safety of both user and luminaire system during installation.

Model Encoding

i modol Enooding	
XLG - 200 I - L - DA2	
	(DA2: DALI-2 dimming function
	$ \int DA2-A: DALI-2 dimming function with 12V/250mA Auxiliary available (optional)$
	 Rated output voltage(L/H types)
	∫ : For standard version
	$ \int$ I:For India version(by request with Input over voltage protection)
	- Rated wattage
	— Series name


Туре	Function	Note
DA2	DALI-2 control technology with lo adjustable via built-in potentiometer	In Stock
DA2-A	DALI-2 control technology with Io adjustable via built-in potentiometer and auxiliary power 12V/250mA	by request



SPECIFICATION

		XLG-200L	XLG-200	·n- [_]			
-	RATED CURRENT(default)	700mA	3500mA				
	RATED POWER	200W	200W				
	CONSTANT CURRENT REGION Note.2	142 ~285V	27 ~ 56V				
	FULL POWER CURRENT RANGE	700~1050mA	3500~5550mA				
OUTPUT	OPEN CIRCUIT VOLTAGE (max.)	320V	65V				
OUTPUT		(Via the built-in potentiometer)					
	CURRENT ADJ. RANGE	350~1050mA	1750~5550mA				
	CURRENT RIPPLE	4.0%(@ full load)					
	CURRENT TOLERANCE	±5%					
	AUXILIARY DC OUTPUT	12V@250mA tolerance ±10%, ripple 200mVp-p (only for DA2-A-type)					
	SET UP TIME	500ms/230VAC, 1200ms/115VAC					
INPUT	VOLTAGE RANGE Note.4	100 ~ 305VAC 142VDC ~ 431VDC					
		(Please refer to "STATIC CHARACTERISTIC" ang " DRIVING METHODS OF LED MODULE"section)					
	FREQUENCY RANGE	47~63Hz					
	POWER FACTOR (Typ.)	$PF \ge 0.97 / 115VAC, PF \ge 0.95 / 230VAC, PF \ge 0.92 / 277VAC at full load(Discourse for to "Downs Factor Characteristic" social)$					
		(Please refer to "Power Factor Characteristic" section)					
	TOTAL HARMONIC DISTORTION	THD<10% (@ load \geq 50% at 115VAC/230VAC ,@load \geq 75% at 277VAC)					
		Please refer to "TOTAL HARMONIC DISTORTION (THD)" section					
	EFFICIENCY (Typ.) Note.14	94%	93%				
	AC CURRENT (Typ.)	2.2A/115VAC 1.1A/230VAC 0.9	0A/277VAC				
	INRUSH CURRENT(Typ.)	COLD START 75A(twidth=400µs measu	COLD START 75A(twidth=400µs measured at 50% lpeak) at 230VAC; Per NEMA 410				
	MAX. NO. of PSUs on 16A	2 unit/circuit brooker of ture D) / C unite					
	CIRCUIT BREAKER	3 unit(circuit breaker of type B) / 6 units	3 unit(circuit breaker of type B) / 6 units(circuit breaker of type C) at 230VAC				
	LEAKAGE CURRENT	<0.75mA / 277VAC					
		<0.7511A7277VAC					
	STANDBY POWER CONSUMPTION	Standby power consumption <0.5W (D	imming OFF, Only for standard version DA2-type	e)			
	SHORT CIRCUIT		ng, recovers automatically after fault condition is				
PROTECTION	INPUT OVER VOLTAGE Note.7			ge, recovers automatically after fault condition is remov			
		Can survive input voltage stress of 440					
	OVER TEMPERATURE	Stage 1: Derating to 75% loading; stag	e 2: Derating to 50% loading. recovers automation	cally after fault condition is removed			
	WORKING TEMP.	Tcase=-40 ~ +90°C (Please refer to "Ol	JTPUT LOAD vs TEMPERATURE" section)				
	MAX. CASE TEMP.	Tcase=+90°C					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH non-conder	sing				
	TEMP. COEFFICIENT	±0.06%/°C (0~60°C)					
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period f	or 72min each along X Y 7 axes				
			0,,,	247.2.12 (EL) appandix Louitable for amorganov			
	SAFETY STANDARDS			347-2-13 (EL) appendix J suitable for emergency			
				15885(Part2/Sec13)(for XLG-200I-DA2 only); IP67 approv			
	DALI STANDARDS	Comply with IEC62386-101,102,207,251,Device type 6(DT6)					
	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC	O/P-FG:1.8KVAC				
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms	/ 500VDC / 25°C / 70% RH				
		Parameter	Standard	Test Level/Note			
		Conducted	BS EN/EN55015(CISPR15) ,GB/T 177-	43			
		Radiated	BS EN/EN55015(CISPR15) ,GB/T 177	43			
	EMC EMISSION	Harmonic Current	BS EN/EN61000-3-2, GB17625.1	Class C @load≥50%			
		Voltage Flicker	BS EN/EN61000-3-3				
SAFETY &		BS EN/EN61547	BOEM/EN01000-0-0				
EMC		Parameter	Standard	Test Level/Note			
	-	ESD	BS EN/EN61000-4-2	Level 3, 8KV air ; Level 2, 4KV contact			
				Level 3, KV air ; Level 2, 4KV contact			
		Radiated	BS EN/EN61000-4-3	LEVEL Z			
		EET (D		1 10			
		EFT/Burst	BS EN/EN61000-4-4	Level 3			
	EMC IMMUNITY	Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth			
	EMCIMMUNITY						
	EMC IMMUNITY	Surge	BS EN/EN61000-4-5	4KV/Line-Line 6KV/Line-Earth			
	EMC IMMUNITY	Surge Conducted Magnetic Field	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods,			
	EMC IMMUNITY	Surge Conducted	BS EN/EN61000-4-5 BS EN/EN61000-4-6	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4			
0.000	EMC IMMUNITY	Surge Conducted Magnetic Field	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
OTHERS	MTBF	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
OTHERS	MTBF DIMENSION	Surge Conducted Magnetic Field Voltage Dips and Interruptions	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods			
	MTBF DIMENSION PACKING	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 i 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, 30% dip 25 periods, 30% dip 25 periods 217F (25°C)			
OTHERS	MTBF DIMENSION PACKING 1. All parameters NOT specially r 2. Please refer to "DRIVING MET	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 i 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE [*] .	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 (Bellcore); 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, 30% dip 25 periods, 30% dip 25 periods 217F (25°C)			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING MET 3. Tolerance : includes set up tol	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 (199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu "HODS OF LED MODULE". rance, line regulation and load regulation	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, 30% dip 25 periods, 30% dip 25 periods 217F (25°C)			
	MTBF DIMENSION PACKING 1. All parameters NOT specially r 2. Please refer to "DRIVING ME" 3. Tolerance : includes set up tol 4. De-rating may be needed und 5. Length of set up time is measu	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 (199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE*. renoe, line regulation and load regulator re low input voltages. Please refer to "ST/ red at first cold start. Turning ON/OFF th	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 (Bellcore); 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature	4KV/Line-Line 6KV/Line-Earth Level 2 295% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C)			
	MTBF DIMENSION PACKING 1. All parameters NOT specially i 2. Please refer to "DRIVING ME" 3. Tolerance : includes set up tol 4. De-rating may be needed und 5. Length of set up time is measu inside driver is very high, it will	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 i 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". prance, line regulation and load regulation pr low input voltages. Please refer to "ST irred at first cold start. Turning ON/OFF th lead to a longer set up time.	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature I. TIC CHARACTERISTIC" sections for details. e driver may lead to increase of the set up time.	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) s. Especially when the temperature			
	MTBF DIMENSION PACKING 1. All parameters NOT specially r 2. Please refer to "DRIVING ME" 3. Tolerance : includes set up tolo 4. De-rating may be needed und 5. Length of set up time is measu inside driver is very high, it will 6. Based on IEC 62386-101/102	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 (199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". orance, line regulation and load regulation rance, line regulation and load regulation ro low input voltages. Please refer to "ST red at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature t. TIC CHARACTERISTIC" sections for details. e driver may lead to increase of the set up time. gulations,the set up time needs to test with a DA	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) s. Especially when the temperature			
	MTBF DIMENSION PACKING 1. All parameters NOT specially r 2. Please refer to "DRIVING ME 3. Tolerance : includes set up tol 4. De-rating may be needed und 5. Length of set up time is meass inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function,otherw	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 i 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". prance, line regulation and load regulation pr low input voltages. Please refer to "ST irred at first cold start. Turning ON/OFF th lead to a longer set up time.	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature h. TIC CHARACTERISTIC" sections for details. e driver may lead to increase of the set up time. gulations,the set up time needs to test with a DA Oms.	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) s. Especially when the temperature			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING MET 3. Tolerance : includes set up tolo 4. De-rating may be needed und 5. Length of set up time is measu inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherw 7. Input over voltage only for XLC 8. The driver is considered as a o	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 it 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". rance, line regulation and load regulation rr low input voltages. Please refer to "STJ red at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re ise the set up time will be longer than 50 5-2001 series, and I series without UL/CS.	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature t, rated current and 25°C of ambient temperature t, attach current and 25°C of ambient temperature t, rated current and 2	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) s. Especially when the temperature LI controller which can support for ance will be affected by the			
	MTBF DIMENSION PACKING 1. All parameters NOT specially r 2. Please refer to "DRIVING ME 3. Tolerance : includes set up told 4. De-rating may be needed und 5. Length of set up time is meass inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherw 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 (199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". HODS OF LED MODULE". Trance, line regulation and load regulation r low input voltages. Please refer to "ST ired at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re rise the set up time will be longer than 50 -2001 series, and 1 series without UL/CS somponent that will be operated in combin guipment manufacturers must re-qualify	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature t. TIC CHARACTERISTIC' sections for details. e driver may lead to increase of the set up time. gulations,the set up time needs to test with a DA 0ms. A certificate. nation with final equipment. Since EMC performa EMC Directive on the complete installation again	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) s. Especially when the temperature LI controller which can support for ance will be affected by the			
	MTBF DIMENSION PACKING 1. All parameters NOT specially r 2. Please refer to "DRIVING ME" 3. Tolerance : includes set up tole 4. De-rating may be needed und 5. Length of set up time is meass inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, other 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.m	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 i 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE [*] . rrance, line regulation and load regulation pri da tirst cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re ise the set up time will be longer than 50 6-2001 series,and I series without UL/CS. component that will be operated in combi- gequipment manufacturers must re-qualify eanwell.com//Upload/PDF/EMI_statemer	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-8 BS EN/EN61000-4-11 (Bellcore) ; 150.1K hrs min. MIL-HDBK-2 (K, rated current and 25°C of ambient temperature h. ATTIC CHARACTERISTIC" sections for details. e driver may lead to increase of the set up time. gulations,the set up time needs to test with a DA Oms. A certificate. nation with final equipment. Since EMC performa EMC Directive on the complete installation agait (_en.pdf)	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) e. Especially when the temperature Ll controller which can support for ance will be affected by the n.			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING ME 3. Tolerance : includes set up tol 4. De-rating may be needed und 5. Length of set up time is meass inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherwy 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.m 9. The ambient temperature dera 10. Please refer to the warrantys	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 (199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". HODS OF LED MODULE". Trance, line regulation and load regulation red at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re rise the set up time will be longer than 50 -2001 series,and 1 series without UL/CS component that will be operated in combin guipment manufacturers must re-qualify eanwell.com//Upload/PDF/EML_statement on MEAN WELL's website at h	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 The trated current and 25°C of ambient temperature t, rated current and 25°C of ambient temperature t. TIC CHARACTERISTIC" sections for details. e driver may lead to increase of the set up time. gulations,the set up time needs to test with a DA 0ms. A certificate. hation with final equipment. Since EMC performa EMC Directive on the complete installation again t_en.pdf) and of 5°C/1000m with fan models for operating tp://www.meanwell.com	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) Especially when the temperature LI controller which can support for ance will be affected by the n. altitude higher than 2000m(6500ft).			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING ME" 3. Tolerance : includes set up told 4. De-rating may be needed und 5. Length of set up time is meass: inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherwith 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.m 9. The ambient temperature dera 10. Please refer to the warranty st 11. This series meets the typical	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 / 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE ⁷ . Trance, line regulation and load regulation or low input voltages. Please refer to "STr read at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re rise the set up time will be longer than 500 >200 1 series,and 1 series without UL/CS. component that will be operated in combin gaujment manufacturers must re-qualify eanwell.com//Upload/PDF/EMI_statemer ting of 3.5°C/1000m with fanless models tatement on MEAN WELL's website at h ffe expectancy of >50,000 hours of opera	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-8 BS EN/EN61000-4-11 (Bellcore) ; 150.1K hrs min. MIL-HDBK-2 (Bellcore) ; 150.1K hrs min. MIL-HD	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) e. Especially when the temperature LI controller which can support for ance will be affected by the n. altitude higher than 2000m(6500ft). ber DLC), is about 75°C or less.			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING MET 3. Tolerance : includes set up told 4. De-rating may be needed und 5. Length of set up time is measu inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherw 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.m 9. The ambient temperature dera 10. Please refer to the warranty s 11. This series meets the typical 12. Products sourced from the AY	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 i 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". renace, line regulation and load regulation rr low input voltages. Please refer to "ST/ renat first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re ise the set up time will be longer than 50 5-2001 series,and I series without UL/CS -2001 series,and I series without UL/CS 5-2001 series,and I series without UL/CS 6-2001 series series regions may not have the CCC/P	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature t, rated current and 25°C of ambient temperature t, rated current and 25°C of ambient temperature t, attact current a	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) e. Especially when the temperature LI controller which can support for ance will be affected by the n. altitude higher than 2000m(6500ft). ber DLC), is about 75°C or less.			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING ME" 3. Tolerance : includes set up told 4. De-rating may be needed und 5. Length of set up time is meass: inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherwith 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.me 9. The ambient temperature dera 10. Please refer to the warranty st 11. This series meets the typical 12. Products sourced from the Ar 13. For any application note and https://www.meanwell.com/U	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 I 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT mentioned are measured at 230VAC inpu HODS OF LED MODULE". Terace, line regulation and load regulation arence, line regulation and load regulation rence, line regulation and interruption re- tise the set up time. DALI power on timing and interruption re- sise the set up time will be longer than 500 >2001 series, and I series without UL/CS component that will be operated in combin gaujment manufacturers must re-qualify file expectancy of >50,000 hours of opera- nericas regions may not have the CCC/P IP water proof function installation caution load/PDF/LED_EN.pdf	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore) ; 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature temperature t, rated current and 25°C of ambient temperature t, please refer our user manual before using.	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) e. Especially when the temperature LI controller which can support for ance will be affected by the n. altitude higher than 2000m(6500ft). ber DLC), is about 75°C or less.			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING MET 3. Tolerance : includes set up told 4. De-rating may be needed undid 5. Length of set up time is measured inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherwork 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.m9 9. The ambient temperature dera 10. Please refer to the warranty se 11. This series meets the typical 12. Products sourced from the Ar 13. For any application note and https://www.meanwell.com/Uj 14. The efficiency will drop 1% be	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 it 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". rance, line regulation and load regulation or low input voltages. Please refer to "STJ red at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re- rise the set up time will be longer than 50 6-200 1 series,and I series without UL/CS 5-200 1 series,and I series without UL/CS 6-200 1 series,and I series without I series series regions may not have the CCC/P 1 water proof function installation caution obload/PDF/LED_EN_reginstarts 6-200 1 series series regions may not have the CCC/P	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore); 150.1K hrs min. MIL-HDBK-2 t, rated current and 25°C of ambient temperature t. TTIC CHARACTERISTIC" sections for details. e driver may lead to increase of the set up time. gulations,the set up time needs to test with a DA Oms. A certificate. auton with final equipment. Since EMC performate EMC Directive on the complete installation again t_en.pdf) and of 5°C/1000m with fan models for operating tp://www.meanwell.com tSC/BIS/KC logo. Please contact your MEAN WE nplease refer our user manual before using. ayd 3W condition.	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) s. Especially when the temperature Ll controller which can support for ance will be affected by the n. altitude higher than 2000m(6500ft). per DLC), is about 75°C or less. ELL sales for more information.			
	MTBF DIMENSION PACKING 1. All parameters NOT specially r 2. Please refer to "DRIVING ME 3. Tolerance : includes set up tol 4. De-rating may be needed und 5. Length of set up time is meass inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function, otherw 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.m 9. The ambient temperature dera 10. Please refer to the warrantys 11. This series meets the typical 12. Products sourced from the Ar 13. For any application note and https://www.meanwell.com/U 14. The efficiency will drop 1% be 15. H type: RCM is on a volunta	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 i 199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT nentioned are measured at 230VAC inpu HODS OF LED MODULE". Tradae, line regulation and load regulation r low input voltages. Please refer to "ST ired at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re rise the set up time will be longer than 50 5-200 I series, and I series without UL/CS. component that will be operated in combin guipment manufacturers must re-qualify eanwell.com//Upload/PDF/EMI_statemer ting of 3.5°C/1000m with fanless models tatement on MEAN WELL's website at h fife expectancy of >50,000 hours of opera nericas regions may not have the CCC/P IP water proof function installation caution load/PDF/LED_EN.pdf used on auxiliary power version with full k y basis. Non IC classification Independe	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellocre); 150.1K hrs min. MIL-HDBK-2 Transformer t, rated current and 25°C of ambient temperature n. TIC CHARACTERISTIC" sections for details. e driver may lead to increase of the set up time. gulations,the set up time needs to test with a DA 0ms. A certificate. nation with final equipment. Since EMC performate EMC Directive on the complete installation again t_en.pdf) and of 5°C/1000m with fan models for operating ty://www.meanwell.com ttion when Tcase, particularly @ point (or TMP, r SE/BIS/KC logo. Please contact your MEAN WE n, please refer our user manual before using. aod 3W condition. nt LED control gear is not suitable for residential	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) s. Especially when the temperature Ll controller which can support for ance will be affected by the n. altitude higher than 2000m(6500ft). per DLC), is about 75°C or less. ELL sales for more information.			
	MTBF DIMENSION PACKING 1. All parameters NOT specially 1 2. Please refer to "DRIVING MET 3. Tolerance : includes set up told 4. De-rating may be needed undid 5. Length of set up time is measured inside driver is very high, it will 6. Based on IEC 62386-101/102 DALI power on function,otherw 7. Input over voltage only for XLC 8. The driver is considered as a complete installation, the final (as available on https://www.m 9. The ambient temperature dera 10. Please refer to the warranty set 11. This series meets the typical 12. Products sourced from the Ar 13. For any application note and https://www.meanwell.com/JU 14. The efficiency will drop 1% be 15. H type: RCM is on a volunta L type: RCM is on a volunta	Surge Conducted Magnetic Field Voltage Dips and Interruptions 1747.5K hrs min. Telcordia SR-332 (199*63*35.5mm (L*W*H) 0.9Kg;16pcs/15Kg/0.75CUFT mentioned are measured at 230VAC inpu HODS OF LED MODULE". rance, line regulation and load regulation er low input voltages. Please refer to "ST/ red at first cold start. Turning ON/OFF th lead to a longer set up time. DALI power on timing and interruption re- rise the set up time will be longer than 50 >200 I series, and I series without UL/CS component that will be operated in combin quipment manufacturers must re-qualify eanwell.com/Upload/PDF/EML_statemert ting of 3.5°C/1000m with fanless models tatement on MEAN WELL's website ath fie expectancy of >50.000 hours of opera- nericas regions may not have the CCC/P IP water proof function installation caution load/PDF/LED_E.N.pdf used on auxiliary power version with full lery basis. Non IC classification Independe y basis and meets relevant IEC or AS/NX	BS EN/EN61000-4-5 BS EN/EN61000-4-6 BS EN/EN61000-4-8 BS EN/EN61000-4-11 Bellcore); 150.1K hrs min. MIL-HDBK-2 Image: the set of	4KV/Line-Line 6KV/Line-Earth Level 2 Level 4 >95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods 217F (25°C) e. Especially when the temperature L1 controller which can support for ance will be affected by the n. altitude higher than 2000m(6500ft). per DLC), is about 75°C or less. ELL sales for more information. installations:			




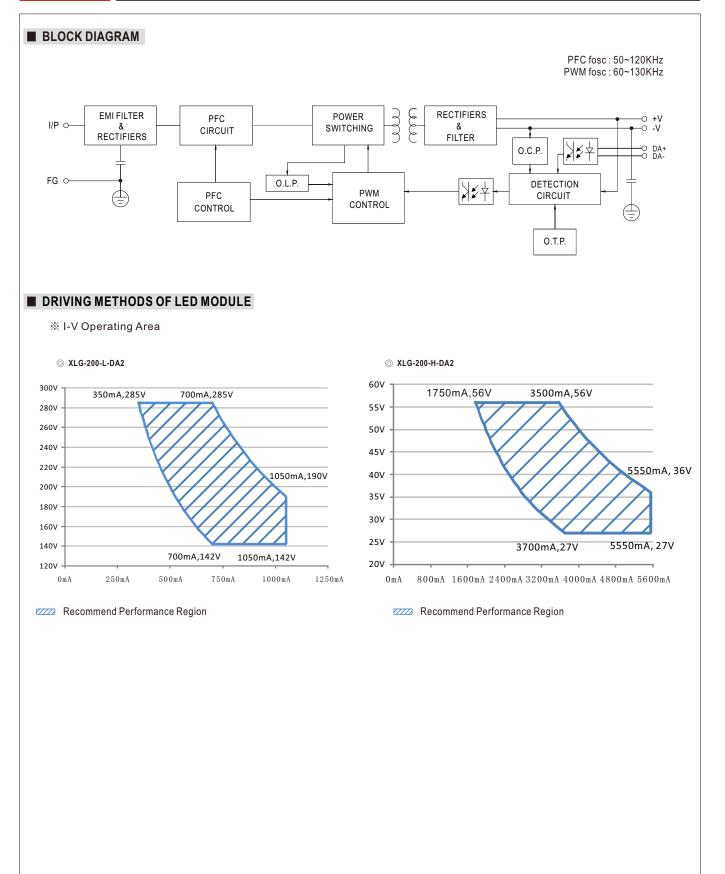




200W Constant Power Mode with DALI-2 LED Driver

LED Driver XLG-200-DA2 series

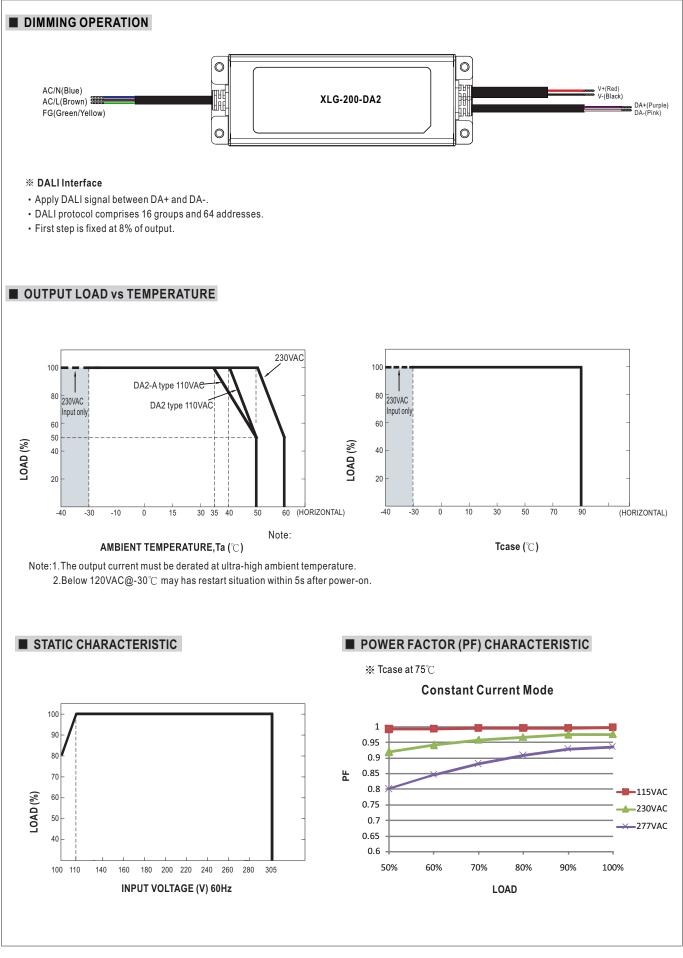



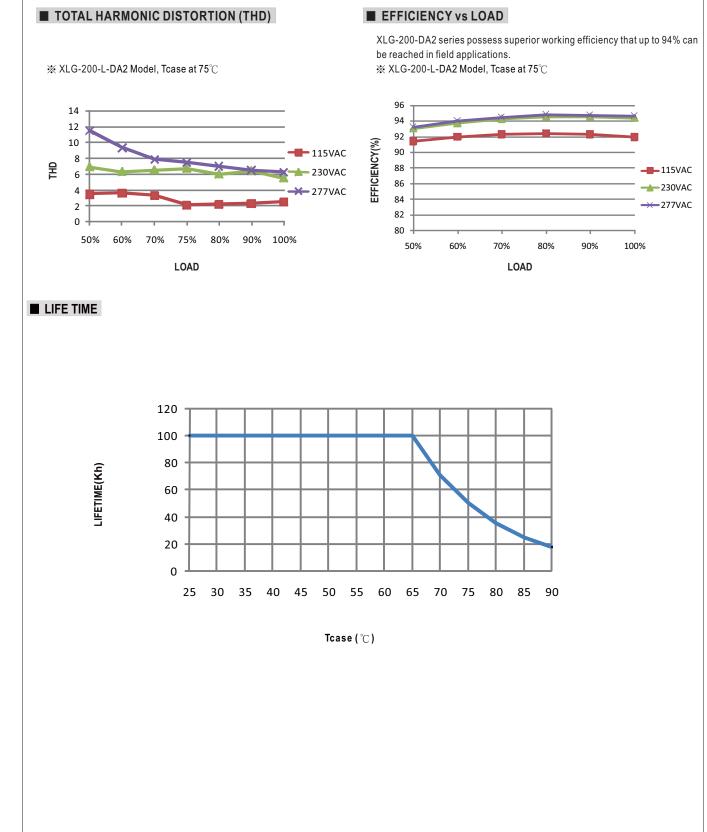

File Name:XLG-200-DA2-SPEC 2024-10-11



200W Constant Power Mode with DALI-2 LED Driver XLG-200-DA2 series

